


Features:

- CPU microprocessor control unit
- 2x USB port for mobile devices
- AVR – automatic voltage regulation
- Frequency auto-select
- Friendly buzzer
- Startup auto-diagnostic
- Cold start
- Advanced battery management
- Overcurrent protection, low battery voltage protection
- Auto-battery charger in OFF mode
- USB communication port (option)
- Auto recovery after mains supply back

Application: Low power telecommunication systems, personal computers , cctv, access control systems, control systems, measuring systems.

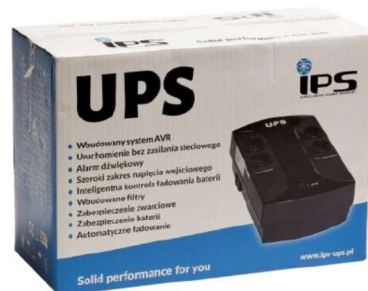

CE RoHS



1f/1f

IP20

3x
SCHUKO

AGM
12V



AUTO
RECOVER



HF

LINE
INTERACTIVE

TOWER

PF=0,6




230V AC
50Hz

AVR

Technical parameters:

MODEL	DM-LI-0k6-PC-1x7	DM-LI-0k6-PC-1x7-USB
Output power (apparent/active)	600VA/360W	
INPUT		
Rated input voltage	230Vac \pm 25%	
Input voltage range	50/60 Hz \pm 0,5%Hz	
OUTPUT		
Output voltage	230Vac \pm 10%	
Frequency	50/60Hz \pm 0,2Hz	
Output waveform	Mains mode: pure sine wave Battery mode: modified sine wave	
Crest factor	3:1	
Transfer time	Typical: 2-7ms, max: 10ms	
Output sockets	UPS + ochrona przepięciowa: 3 szt (CEE 7/3 Schuko) Ochrona przepięciowa: 3 szt (CEE 7/3 Schuko) UPS + USB: 2szt 5V/1A	
BATTERY		
Working voltage	12V	
Configuration	1x 12V/7Ah	
Backup time (min.)100%/75%/50%	2 min / 5min / 8min	
Typical recharge time	6-8 hours for 90% capacity	
PROTECTIONS		
Full protection	Short circuit, overload, low battery	
ENVIRONMENT		
Humidity	20~90% RH @ 0~40°C (non-condensating)	
Noise level	\leq 45 dB	
COMMUNICATIONS		
USB (Standard) /RS-232 (option)	None	Support with Windows®98/2000/2003/XP/Vista/2008/ Windows®7/Windows®8
DIMMENSION & WEIGHT		
Weight netto/brutto (kg)	5,5/6,0	
Lenght/width/height (mm) a / b / c	100/183/275	
Box lenght/width/height (mm)	150/240/335	
Shiping box	3szt	
STANDARDS		
LVD	EN62040-1:2008	
EMC compability	EN62040-1:2006	
	EN61000-3-2:2006 + A1:2009 + A2:2009	
	EN61000-3-3:2013	

Technical drawings:

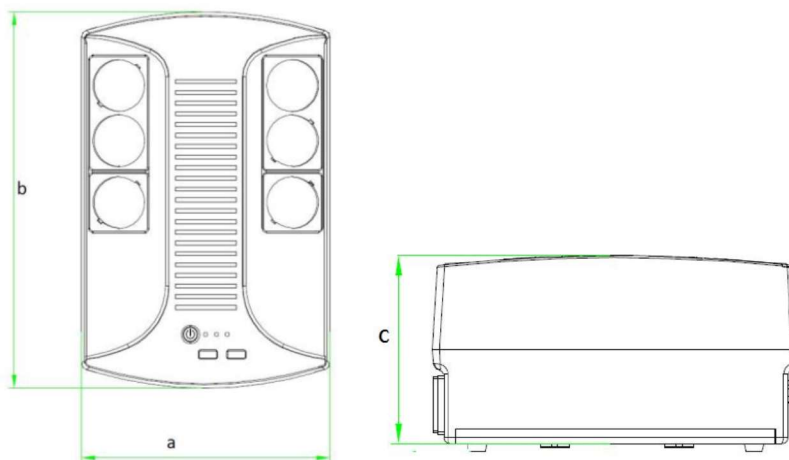

Standard accessories:

- internal batteries 12V/7Ah



- User manual

Additional accessories (options):

- RS-232 port



- USB port



- internal batteries MWH
9-12, MW 7.2-12, MWL
7.2-12



- UPSmart
software



- USB cables

